

RESIDENTIAL

Cast Iron Boilers



PeerlessBoilers.com

Series MI-e[®] / Series MI-x[™] Gas Boiler



FUEL	Gas-Fired (Natural or LP)
INPUT	70 to 280 MBH
OUTPUT	59 to 236 MBH
VENTING	Natural Draft
TRIM	Water
IGNITION	Spark Pilot
AFUE	Up to 84.6%

Series 63[™] / Series 63-x[™] Gas Boiler

FUEL	Gas-Fired (Natural or LP*)
INPUT	88.5 to 287.5 MBH
OUTPUT	74 to 238 MBH
VENTING	Natural Draft
TRIM	Steam
IGNITION	Spark Pilot
AFUE	Up to 83%

*63-x - natural gas only



Series PSCII[™] Gas Boiler



FUEL	Gas-Fired (Natural or LP)
INPUT	65 to 150 MBH
OUTPUT	56 to 128 MBH
VENTING	Direct Vent, Sealed Combustion
TRIM	Water
IGNITION	Spark Pilot
AFUE	Up to 86%

Series WBV[®] Oil Boiler

FUEL	#2 oil, B5-B20
INPUT	84 to 273 MBH
OUTPUT	75 to 237 MBH
VENTING	Natural Draft
TRIM	Water or Steam
COMBUSTION	Flame Retention Burner
AFUE	Up to 87.5%



Series EC/ECT[™] Oil Boiler




FUEL	#2 oil, B5-B20
INPUT	105 to 420 MBH
OUTPUT	92 to 347 MBH
VENTING	Natural Draft
TRIM	Water or Steam
COMBUSTION	Flame Retention Burner
AFUE	Up to 87.6%



Series WV-DV[™] Oil Boiler

FUEL	#2 oil, B5-B20
INPUT	105 to 182 MBH
OUTPUT	92 to 158 MBH
VENTING	Direct Vent, Sealed Combustion
TRIM	Water
COMBUSTION	Flame Retention Burner
AFUE	Up to 86.7%

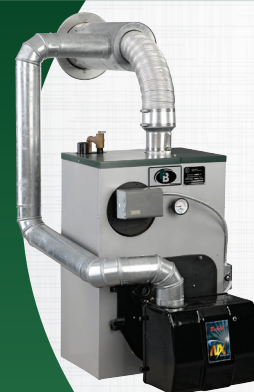

Peerless[®] Boilers - The BEST Built Boilers!



SCAN ME
FOR FULL LINE
OF PRODUCTS
PeerlessBoilers.com

RESIDENTIAL Condensing Boilers and Indirect-Water Heaters



PeerlessBoilers.com

Peerless® PureFire® Gas Boiler

Eight Residential Sizes: PF-50 to PF-399



FUEL	Gas-Fired (Natural or LP)
INPUT	50 to 399 MBH
OUTPUT	47 to 380 MBH
VENTING	Direct Vent, Sealed Combustion
TRIM	Water
IGNITION	Direct Spark
AFUE	95%



Series PBC™ Gas Combination Boiler



CONSTRUCTION	Stainless Steel
FUEL	Gas-Fired (Natural or LP)
INPUT	80 to 120 MBH
OUTPUT	76.2 to 114.6 MBH
HOT WATER OUTPUT	Up to 5.2 GPM
VENTING	Direct Vent, Sealed Combustion
IGNITION	Direct Spark
AFUE	Up to 95.3%



Peerless® Partner® Indirect-Fired Water Heater



CONSTRUCTION	Partner® PP Tank: Stainless Steel Tank, Maintenance Free Plastic Jacket Partner® PV Tank: Seamless, Thermoplastic
FUEL	Indirect-Fired
STORAGE CAPACITY	30 to 119 Gallons
FIRST HOUR RATINGS	169 to 477 gal/hr

Peerless® PureFire® PFW

High Efficiency, Large Volume Hot Water Supply Kit for PureFire® PF-200 and PF-399

CONSTRUCTION	Stainless Steel
FUEL	Gas-Fired (Natural or LP)
INPUT	199 to 399 MBH
OUTPUT	185 to 380 MBH
VENTING	Direct Vent, Sealed Combustion
TRIM	Water
COMBUSTION	Direct Spark
STORAGE CAPACITY	Tank Dependent



Peerless® Boilers - The BEST Built Boilers!



SCAN ME
FOR FULL LINE
OF PRODUCTS
PeerlessBoilers.com